

**Bright,
Quiet & Secure**



**High quality XGA/SVGA projector for all multimedia needs
- from the classroom to the boardroom**

Dual VGA inputs for Optimum Connectivity

Optoma pioneered the use of VGA inputs for both PC and SCART. The unique SCART/VGA adapter enables direct connection of a SCART source to the projector with readily available VGA cabling.

The new EP719 and EP716 projectors have two VGA inputs, allowing simultaneous connection of a PC and a SCART source, providing optimum quality for both inputs. No cable swapping or re-configuration is required. Either source can be directly selected from the remote control, allowing you to stay in charge of your multi-media presentation.

Password Protection for Peace of Mind

With picture quality this good, everyone will want to use the EP719 or EP716. Password protection can prevent unauthorised use of the projector, in addition, a timer mode allows the projector to be loaned out for a fixed time before it is automatically disabled.

- Dual VGA Inputs
- Password Protection
- 2000/1800 Lumens
- XGA/SVGA Native resolution
- 4000 Hour lamp-life
- 2500/2000:1 Contrast ratio
- DLP™ technology for consistent long-term performance.

EP719/716

Digital DLP™ Projector



- Wide Connectivity to include: 2 x VGA plus component, SCART RGB, composite & S-video with auto source recognition
- Quiet Operation - 28dB
- Ultra Light - 2kg

Preset Modes


With 5 standard preset modes:

- PC** - for maximum brightness.
- Movie** - High contrast & colour accuracy.
- Game** - Bright vivid colours.
- sRGB** - Standardised accurate colour
- User** - Precise control for power users, you are guaranteed the best possible picture in any application.

Specification	EP719	EP716
Native Resolution	XGA (1024 x 768)	SVGA (800 x 600)
Compressed Resolution	SXGA (1280 x 1024)	XGA (1024 x 768)
Brightness	2000 ANSI Lumens	1800 ANSI Lumens
Contrast Ratio	2500:1	2000:1
Audible Noise	28dB (ECO Mode)	
Long Lamp Life*	4000 Hrs (ECO mode)	
Weight	2 kg	
Security	Password Protection at Start Up / 1 Kensington Lock Port	
Preset Modes	PC - Maximum brightness Movie - Maximum contrast and colour accuracy sRGB - Standardised accurate colour Game - Bright vivid colours User - Precise control for power users	
Display Technology	0.55" Double Data Rate DLP™ Technology Texas Instruments	
Aspect Ratio	4:3 Native, 16:9 Compatible	
Lamp Type	200 W User Replaceable UHP Lamp	
Computer Compatibility	H.Sync 31.5 - 100kHz V.Sync 50 - 85Hz	
Video Compatibility	PAL (B, D, G, H, I, M, N), NTSC (M, 4.43/3.58 MHz), SECAM (B, D, G, K, K1, L) 480i/p, 576 i/p, HDTV (1080i & 720p)	
Uniformity	85%	
Projection Lens	F / 2.7 ~ 3, f = 22 ~ 24 mm, Manual Focus	
Throw Ratio	1.9 ~ 2.1:1 (Projection Distance:Image Width)	
Zoom Type	Manual, Zoom Factor 1.1:1x	
Projection Distance	1.2m - 12m (3.9' - 39.3')	
Image Size	0.6 - 7.77m (24.6" to 306") Diagonal 4:3	
Keystone Correction	Vertical ±15 degrees	
Projection Types	Front, Front ceiling mounted, Rear, Rear ceiling mounted	
Dimensions	230 x 95 x 230 mm W x H x D	
Power Supply	100-240V, 50-60 Hz with PFC Power Supply	
Power Consumption	265 W Standby mode < 15 watts	
Operating Conditions	5°C - 35°C, Max. humidity 80%, Max. Altitude 3000m	
Inputs		
15 Pin D-Sub 1	PC VGA, RGB SCART (supplied adapter), Component (optional adapter)	
15 Pin D-Sub 2	PC VGA, Component (optional adapter)	
4 Pin Mini Din	S-Video	
RCA	Composite Video	
3.5mm Jack	Stereo Audio	
Outputs		
15 Pin D-Sub	PC VGA Monitor loop-through	
Audio	1 x 2w Speaker	
Warranty	Warranty may vary by country. Please see www.optomaeurope.com or ask your local supplier for details.	
Lamp Warranty	6 months or 1000 hours whichever is the sooner	
Supplied Accessories	Lens Cover, AC Power Cord, VGA - VGA Cable, Composite Video Cable (RCA to RCA), Infra Red Remote Control, VGA/SCART Adapter, AAA Type Batteries x 2, Quick Start Card CD User Manual, Warranty Card, Soft Carry Case	
Optional Accessories	Ceiling Mount Kit, Full Function Remote inc. Remote Mouse and USB cable	
Menu Languages	English, French, German, Italian, Spanish, Portuguese, Dutch, Polish, Russian, Finnish, Japanese, Korean, Chinese	
EAN Number	5060059040605 / 5060059040612	

Projection Distance/Image Width		
Projection Distance(m)	Maximum Image Width(m)	Minimum Image Width(m)
1.50	0.775	0.704
2.00	1.033	0.939
2.50	1.291	1.174
3.00	1.549	1.409
4.00	2.065	1.878
5.00	2.582	2.348
6.00	3.098	2.818
7.00	3.614	3.287
8.00	4.131	3.757
9.00	4.647	4.227
10.00	5.163	4.696

For guide purposes only

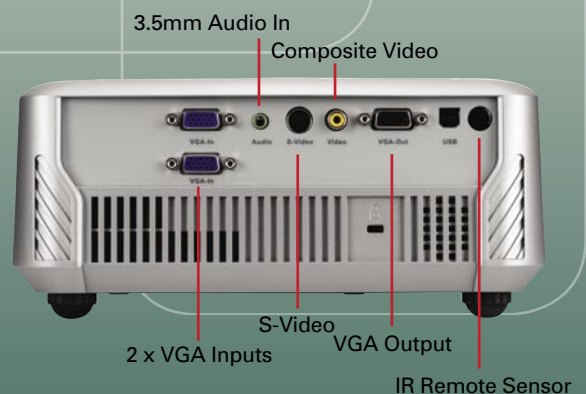

Optoma Europe Ltd.
42 Caxton Way, Watford Business Park,
Watford, Hertfordshire, UK, WD18 8QZ

www.optomaeurope.com

*Typical lamp life achieved through testing. Will vary according to operational use and environmental conditions.

Copyright © 2005, Optoma Europe Ltd. All other product names and company names used herein are for identifications purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. The DLP™ logo and DLP™ medallion are trademarks of Texas Instruments.