

EzPro730

MULTI-MEDIA DLP™ PROJECTORS

EzPro730 Multi-Media DLP™ Projector

Breathtaking Cinematic Quality

Vivid and Crisp Image



HDTV and 16:9 Wide Screen Capability ➔

3lbs Micro Portable Design ➔

Advanced DLP™ Technology for Magic Image ➔

User - Friendly Keypad Control with Backlight ➔

SVGA Resolution with 1,100 ANSI Lumens ➔



- 1100 ANSI Lumens High Brightness
- Outstanding 500:1 Contrast Ratio
- 1:1.2 Zoom Lens



- User Friendly Keypad Control with Backlight



- Multi-Connection for Data and Video Source
- High Definition TV Compatibility


DLP™
A TEXAS INSTRUMENTS TECHNOLOGY

Optoma
Optimize Your Viewing

MICRO PORTABLE DLP™ PROJECTORS



Projection Distance and Image Size*

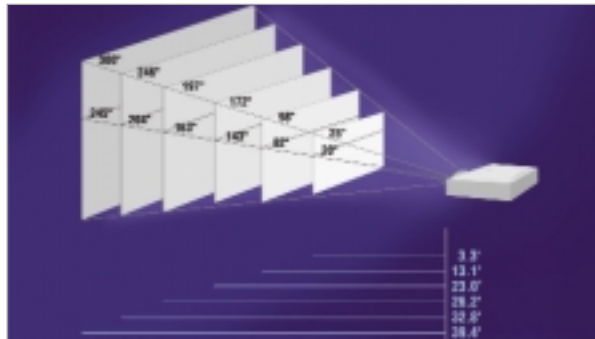

Specifications

Display

Digital Light Processing DLP™
Technology by Texas Instruments

Resolution

SVGA 800 pixels (H) x 600 lines (V)

Computer Compatibility

SXGA (compressed), SVGA, VGA (resizing), Macintosh, NEC PC98 series, and Fujitsu FM Towns

Video Compatibility

NTSC, NTSC4, 43, PAL-M, PAL-N, SECAM, and HDTV (480i/P, 720P)

Aspect Ratio

4:3 Native, 16:9 Compatible

Contrast Ratio (Typical)

500:1(Full On/Off)

Displayable Colors

16.7 Million Colors

Brightness (Typical)

1100 ANSI Lumens

Projection Lens

F=2.2-2.4, f=28.51-34.21

1:1.2 manual zoom and focus

Projection Screen Size

20"(0.5m) - 300" (7.6m) diagonal

Throw Distance

3.3' (1m) - 39.4' (12m)

Horizontal Scan Rate

15-100 kHz

Vertical Refresh Rate

43-120 Hz

Lamp Type

130 W user replaceable P-VIP lamp

Lamp Life (Typical)

2000 hours

Key Stone Correction

+/- 16 degrees

Audio

One internal speaker with 2 watts output

Weight

3 lbs

Dimension

2.0 x 6.9 x 8.9 inches, 52 x 176 x 225mm

Power Supply

AC input 100~240V auto-switching power supply

Power Consumption

180 W (Max.)

Operation Temperature

10 °C ~ 40 °C / 50 °F ~ 104 °F

Noise Level

35 dB (Typical)

Uniformity

85%

Standard Accessories

AC power cord, Composite video cable, S-Video cable, 15-pin VGA signal cable, Phone jack to RCA audio cable, Remote control, User's guide (CD & Quick start card), Carrying case, Lens cap, Warranty card, 2 Batteries.

Optional Accessory

Ceiling Mount kit

Projection Screen Size*

Screen	Max	25"	98"	172"	197"	246"	300"
	Min	20"	82"	143"	163"	204"	245"
Distance		3.3'	13.1'	23.0'	26.2'	32.8'	39.4'
Screen	Diag	25"	98"	172"	197"	246"	300"
	WxH	20"x15"	78"x59"	138"x103"	158"x118"	197"x148"	240"x180"

* This graph/data is for user's reference only.

Dimensions



Connector Ports



Available from



www.optomausa.com

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of all their respective companies. DLP™ and DMD™ are registered trademarks of Texas Instruments Incorporated.