


EzPro735

MICRO PORTABLE DLP™ PROJECTORS

- 3lbs Micro Portable Design
- Advanced DLP™ Technology for Vivid and Crisp Image
- XGA Resolution with 1,100 ANSI Lumens
 - HDTV and 16:9 Wide Screen Capability
 - Outstanding Contrast Ratio 500:1

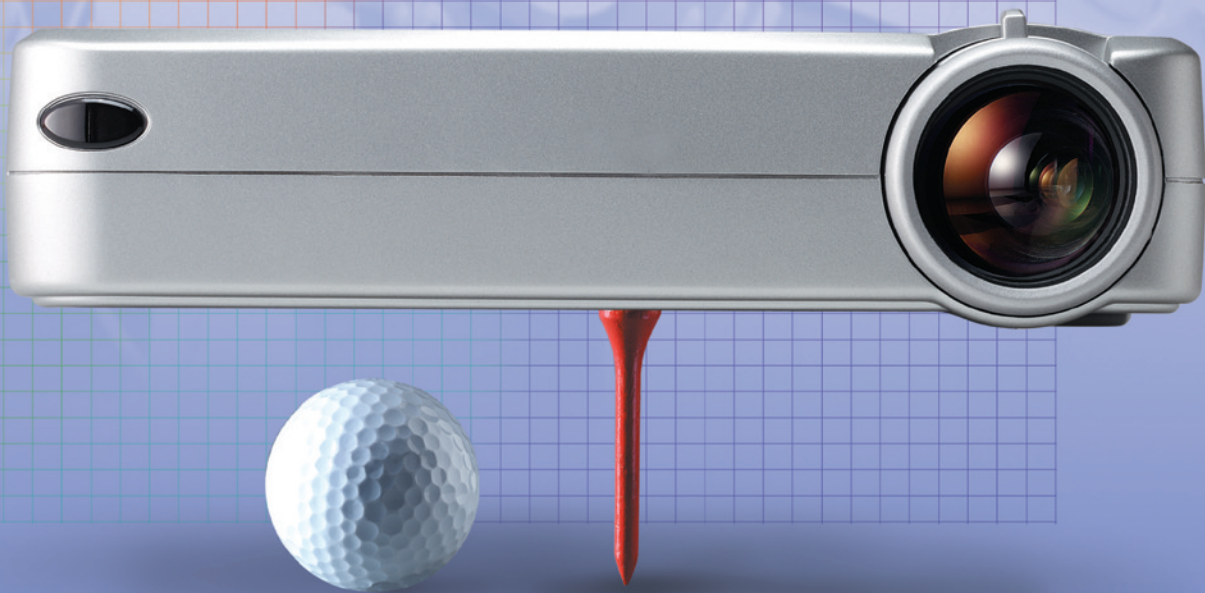

- Full Function Remote with Mouse Control and Laser Pointer



- 1100 ANSI Lumens High Brightness
- Outstanding 500:1 Contrast Ratio
- 1:1.2 Zoom Lens



- User Friendly Keypad Control with Backlight



- Multi-Connection for Data and Video Source
- High Definition TV Compatibility
- DVI/I Interface Available


Optoma
Optimize Your Viewing

DLP™
A TEXAS INSTRUMENTS TECHNOLOGY

MICRO PORTABLE DLP™ PROJECTORS



Projection Distance and Image Size*

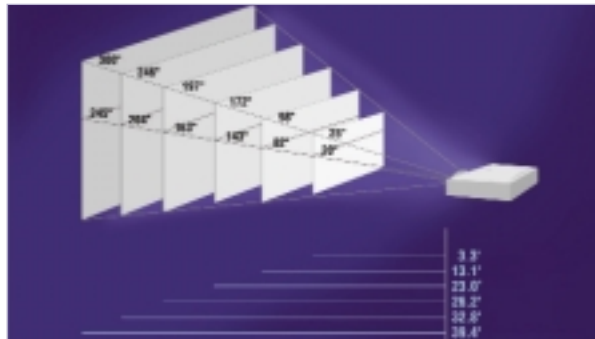

Specifications

Display

Digital Light Processing DLP™
Technology by Texas Instruments

Resolution

XGA 1024 pixels (H) x 768 lines (V)

Computer Compatibility

SXGA (compressed), XGA, SVGA, VGA (resizing), Macintosh, NEC PC98 series, and Fujitsu FM Towns

Video Compatibility

Full NTSC, NTSC, NTSC4, 43, PAL, PAL-M, PAL-N, SECAM, and HDTV (480i/P, 720P, 1080i)

Aspect Ratio

4:3 Native, 16:9 Compatible

Contrast Ratio (Typical)

500:1(Full On/Off)

Displayable Colors

16.7 Million Colors

Brightness (Typical)

1100 ANSI Lumens

Projection Lens

F=2.2-2.4, f=28.51-34.21

1:1.2 manual zoom and manual focus

Projection Screen Size

20"(0.5m) - 300" (7.6m) diagonal

Throw Distance

3.3' (1m) - 39.4' (12m)

Horizontal Scan Rate

15-100 kHz

Vertical Refresh Rate

43-120 Hz

Lamp Type

130 W user replaceable P-VIP lamp

Lamp Life (Typical)

2000 hours

Key Stone Correction

+/- 16 degrees

Audio

One internal speaker with 2 watts output

Weight

3 lbs

Dimension

2.0 x 6.9 x 8.9 inches, 52 x 176 x 225mm

Remote mouse control

Remote control with mouse function & laser pointer

Power Supply

AC input 100~240V auto-switching power supply

Power Consumption

180 W (Max.)

Operation Temperature

10 °C ~ 40 °C / 50 °F ~ 104 °F

Noise Level

35 dB (Typical)

Uniformity

85%

Standard Accessories

AC power cord, D-sub RGB to DVI cable, Composite video cable, RCA audio cable, S-Video cable, DVI signal cable for HDTV/component, User's guide (CD & quick start card) Wireless remote mouse control, Remote mouse Y cable, Carrying case, Lens cap, Warranty card, 2 Batteries.

Optional Accessory

Ceiling Mount kit

Projection Screen Size*


| | | | | | | | |
|----------|------|------|---------|---------|-----------|-----------|-----------|
| Screen | Max | 25" | 98" | 172" | 197" | 246" | 300" |
| | Min | 20" | 82" | 143" | 163" | 204" | 245" |
| Distance | | 3.3' | 13.1' | 23.0' | 26.2' | 32.8' | 39.4' |
| Screen | Diag | 25" | 98" | 172" | 197" | 246" | 300" |
| | Size | WxH | 20"x15" | 78"x59" | 138"x103" | 158"x118" | 197"x148" |

* This graph/data is for user's reference only.

Dimensions



Connector Ports



Available from

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of all their respective companies. DLP™ and DMD™ are registered trademarks of Texas Instruments Incorporated.