



EPSON PowerLite® 52c

For Quality Presentations Priced to Please

Need a lightweight projector that will keep your costs down and still deliver astounding presentations? An unbeatable value in ultraportable projectors, the EPSON PowerLite® 52c brings you 1200 lumens of brightness and superior image quality, without sacrificing features or performance. This 6.4 lb projector offers brilliant color saturation by employing a system of three EPSON 0.5" LCDs. And, its 400:1 contrast ratio delivers deep, dark blacks and crisp, clear whites for outstanding clarity in any situation.

An affordable SVGA performer, the EPSON PowerLite 52c is easy to transport and even easier to use. Ideal for business presentations, school applications, and more, it includes monitor out capability, which allows presenters to use the monitor as a prompt.

Backed by renowned Epson service and support, the projector boasts incredible reliability. In fact, every EPSON PowerLite projector has met stringent quality control standards from the design table to the shipping dock, to ensure the highest degree of performance. And, experienced professionals who service and sell multimedia projectors choose Epson 5:1 as the most reliable.

Ultra bright 1200 lumens; weighs just 6.4 lb

- Incredible brightness from a sleek, ultraportable projector
- Works great in well-lit rooms or for presentations with large audiences

Superior image quality and performance

- Three EPSON 0.5" high aperture LCDs for rich color saturation across the screen
- 400:1 contrast ratio for blacker blacks and whiter whites
- SVGA (800 x 600) resolution for sharp, vivid detail

Easy setup and operation right out of the box


- Monitor out capability so you can display images on a monitor and screen simultaneously
- +/- 15° digital keystone correction
- Digital zoom for position flexibility
- Cable lock feature for security conscious environments
- Start Here Kit gets first time users projecting in just minutes
- Standard carrying case included

State-of-the-art video performance

- HDTV-ready, supports 480i, 480p, 720p, 1080i and 1080p formats (optional cable required)
- Multi-video compatibility, including component (optional cable required)

Outstanding EPSON service and support (all free for the duration of the warranty)

- Comprehensive two-year warranty
- 90-day bulb warranty for added dependability
- EPSON Road Service Program provides a replacement projector, typically within 24 hours
- EPSON PrivateLine™ dedicated toll-free support line available from 6 a.m. to 6 p.m. PST Monday – Friday: Calls are answered live, typically in under a minute
- Two-year International warranty in over 45 countries

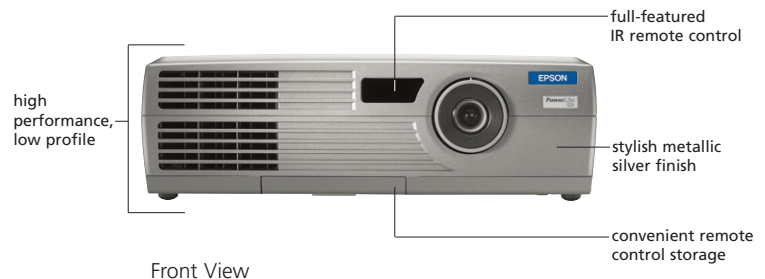

EPSON PowerLite 52c Specifications

| | | |
|--|--|--|
| Projection System | EPSON original LCD prism technology | |
| Projection Method | Front/rear/ceiling mount | |
| LCD | | |
| Size | 0.5" | |
| Driving method | EPSON Poly-Silicon TFT Active Matrix | |
| Pixel number | 480,000 dots x 3 (800 x 600) LCDs | |
| Native resolution | SVGA | |
| Aspect ratio | 4:3 (supports 16:9, 5:4) | |
| Pixel arrangement | Stripe | |
| Projection Lens | | |
| Type | Manual: focus | |
| F-number | 1.5 | |
| f-number | 16.6mm | |
| Zoom ratio | Digital (1.0-1.2); lens at max size, zoom reduces up to 80.66% | |
| Lamp | | |
| Type | 130W UHE | |
| Life (typical) | 1500H | |
| Screen Width Ratio (distance/width) | 1.48 to 1.83:1 | |
| Screen Size (projected distance) | 30" to 300" (0.9m to 11.3m) | |
| Keystone Correction | Vertical: +/-15° | |
| Brightness (typical) | 1200 ANSI lumens | |
| Contrast Ratio | 400:1 | |
| Brightness Uniformity (typical) | 85% | |
| Color Reproduction | 24 bit; 16.7ml | |
| Audio Output | 1W Monaural | |
| Operating Temperature | 41°F to 95°F (5°C to 35°C) | |
| Power Supply Voltage | 100-120V / 200-240V +/-10%, 50/60Hz AC | |
| Power Consumption | 190W (6W at sleep mode) | |
| Dimensions (includes lens and feet) | 8.8" x 12.17" x 4.1" | |
| Dimensions (excludes lens and feet) | 8.6" x 12.17" x 3.66" | |
| Weight | 6.4lb/2.9kg | |
| Fan Noise | 35db | |
| Effective Scanning Frequency Range | | |
| Pixel clock | 13.5MHz to 162MHz | |
| Horizontal | 15KHz to 92KHz | |
| Vertical | 50Hz to 85Hz | |
| Remote Control | | |
| Features | Keystone, source selection, power, color mode, volume, presets, e-zoom, a/v mute, freeze | |
| Operating angle | Right/Left +/- 30° Upper/Lower +/- 15° | |
| Operating distance | 20ft (6m) | |
| RGB | | |
| | Analog RGB I/O | |
| Display performance | | |
| Native | 800 x 600 | |
| Resize | 1024 x 768, 640 x 480 | |
| Input terminal | | |
| Video | Mini D-sub 15 pin | |
| Audio | Stereo mini jack | |
| Output terminal | | |
| Video | Mini D-sub 15pin (monitor out) | |

| | | |
|---------------------|---|--|
| Video I/O | | |
| Display performance | NTSC: 550 lines, PAL: 550 lines (Depends on observation of the multi burst pattern) | |
| Input signal | NTSC, NTSC4.43, PAL, M-PAL, N-PAL, PAL60, SECAM HDTV: 480i, 480p, 720p, 1080i | |
| Input terminal | | |
| Video | Composite Video: RCA (Yellow) x 1; S-video: Mini DIN; Component Video: Mini D-sub 15pin (in common with Analog RGB connector); Video-RGB: Mini D-sub 15pin (in common with Analog RGB connector) | |
| Audio | RCA (White) x 1 | |
| Audio Signal | 500m Vrms/47Kohm | |
| Control I/O | | |
| I/O terminal | RS-232C | |
| Security | | |
| | Kensington®-style lock provision | |


Warranty
Two year limited warranty, 2-year international warranty, 90-day lamp warranty, EPSON Road Service Program and EPSON PrivateLine dedicated toll-free support (U.S. and Canada only)

Supplied Accessories
Power cable, card-type remote control with lithium battery, computer cable, Start Here Kit, soft carrying case

| | | |
|--|------------|--|
| Product/Accessory Part Numbers | | |
| EPSON PowerLite 52c Projector | V11H121020 | |
| Replacement lamp | V13H010L1D | |
| Samsonite wheeled soft case | ELPKS24 | |
| Samsonite Notebook/projector soft shoulder bag | ELPKS43 | |
| ATA molded hardshell case | ELPKS44 | |
| Ceiling mount | ELPMB38 | |
| Suspension adapter | ELPMBAPL | |
| False ceiling plate | ELPMBFCP | |
| Distribution amplifier | ELPDA01 | |
| Component video cable | ELPKC19 | |
| Mac adapter set | ELPAP01 | |
| 50" portable screen | ELPSC06 | |
| 60" portable pop-up screen | ELPSC07 | |
| 80" portable pop-up screen | ELPSC08 | |
| High resolution document imager | ELPDC02 | |
| Motion presentation camera | ELPDC03 | |
| High resolution document camera | V12H064020 | |
| Kensington security lock | ELPSL01 | |

Support-The Epson ConnectionSM
Pre-Sales Support U.S. and Canada 800-463-7766
Automated Technical Support 800-922-8911
Internet Web Site www.epson.com

Presenters ONLINESM presentersonline.com



Epson America, Inc.
3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.
3771 Victoria Park Ave, Toronto, Ontario M1W 3Z5

Epson Latin America
6303 Blue Lagoon Drive, Miami, FL 33126